

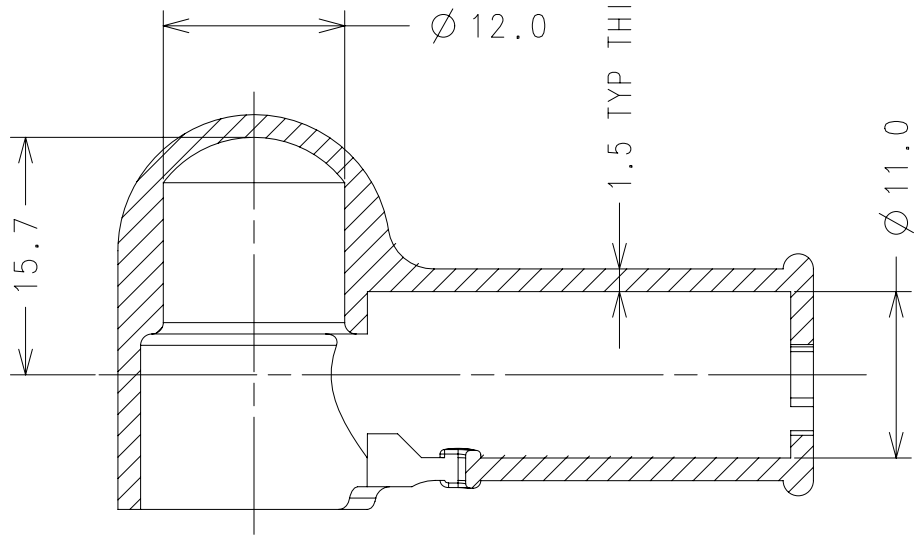
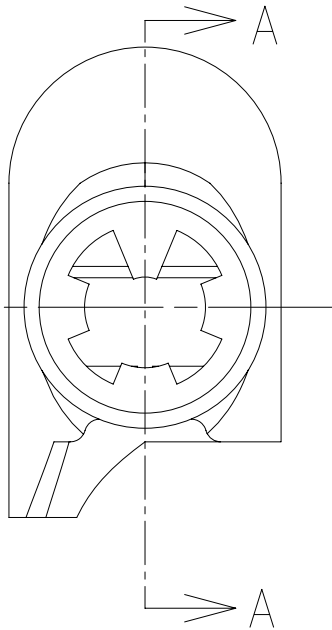
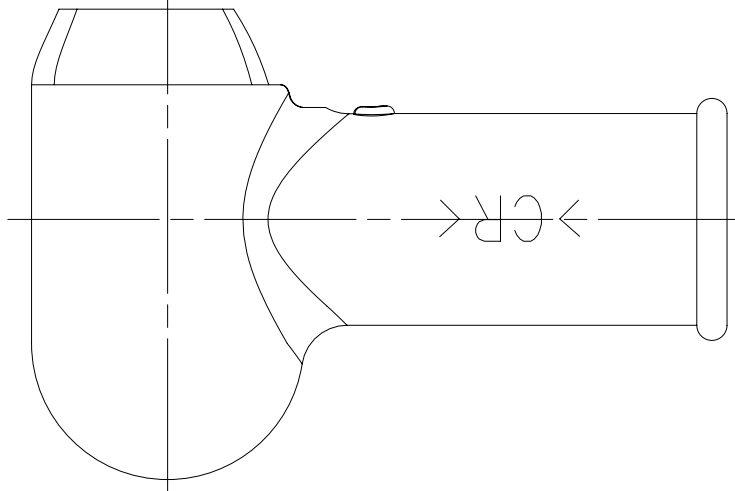
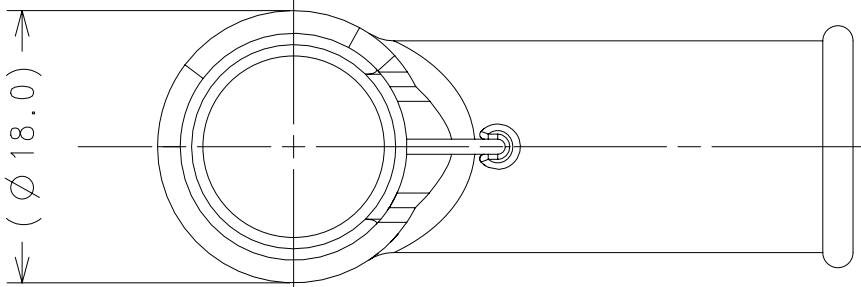


RUBBER PART GENERAL TOLERANCE					
PART DIM.	1	2	③		
0 TO 3	± 0.2	± 0.3	± 0.4		
3 TO 6	± 0.2	± 0.4	± 0.5		
6 TO 10	± 0.3	± 0.5	± 0.6		
10 TO 18	± 0.3	± 0.6	± 0.8		
18 TO 30	± 0.4	± 0.8	± 1.0		
30 TO 50	± 0.5	± 1.0	± 1.5		
50 TO 80	± 0.6	± 1.2	± 2.0		
80 TO 120	± 0.7	± 1.4	± 2.5		
120 TO 180	± 0.8	± 1.6	± 3.0		
180 TO 250	± 1.0	± 2.0	± 4.0		
250 TO 315	± 1.2	± 2.5	± 5.0		
315 TO 400	± 1.5	± 3.0	± 6.0		
400 TO 500	± 1.8	± 3.5	± 7.0		
500 OVER	± 0.4%	± 0.8%	± 1.5%		

B

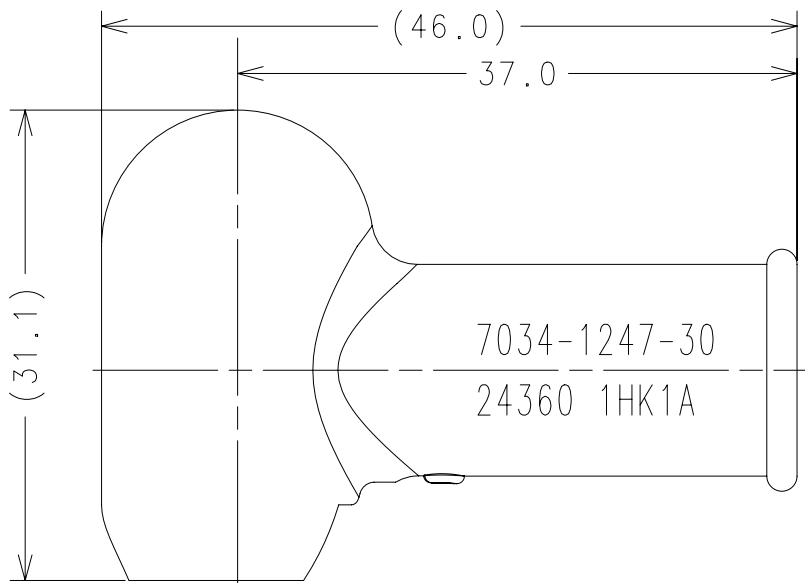

SECTION A-A

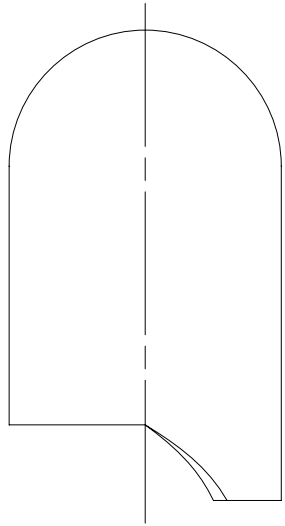

- NOTES:
- MUST BE FREE OF BURRS, FLASH AND IMPERFECTIONS THAT AFFECT FUNCTION
 - GENERAL THICKNESS: $t = 1.5$
 - MATERIAL: CHLOROPRENE RUBBER (BLACK)

ISSUE MARK

								CUSTOMER					MATL. SPEC.				NOTED		TREAT. & FIN.	
								CUSTOMER PART NO.				CUSTOMER DWG NO.								
																NAME				
	10/24/19	NEW			C19-A942	MJG	OFFICE YNA				TRIAL PART NO.				CAP - TERM					
LET	DATE	REVISION RECORD			NO.	CHKD	VENDOR													
GENERAL TOLERANCE							VENDOR NO.													
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO. 7034-1247-30						
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	10/24/19	mm	2:1	3	DWG NO. 7034-1247-30:R						
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN			YAZAKI CORPORATION					
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15				MIKE GNIWEK									
SPECIFIED						WEIGHT					12/09/09									
						5.4 g														

GENERAL TOLERANCE							
10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT	
A ±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	
B ±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	
C ±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	
SPECIFIED						WEIGHT	5.4 g