⑥GENERAL TOLERANCE											
	10MAX	50MAX	100MAX	250MAX	2500VR	R5MAX	R10MAX	R20MAX	R200VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±2.5	±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4					±3°	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2					±3°	0.15

PART NO. AND CH. CODE	A_1	A_2	R_1	R_2	H_1	H_2	⑥M	WIRE SIZE (mm²)
7116-4102-08,B	2.30	4.75	0.45	1.45	(2.30)	(4.25)	0.55	③0.3 ~ 0.5 EQUIVALENT
⑤(7B16-4102-08,B)								
7116-4103-08,B	3.00	4.90	②0.60		(2.95)	(4.40)	0.70	③0.6 ~ 1.25 EQUIVALENT

APPLICABLE WIRE SIZE MARK



7116-4103-08



7116-4102-08
⑤(7B16-4102-08)

VIEW C



SEC. A-A



SEC. B-B

注記

1. 材質：銅合金 t=0.25
2. 適用ゴム栓品番 ：7158-3030-50 ETC.
3. 嵌合相手端子品番：7114-4102-08 ETC.
⑤4. ( ) 内品番は、エアバッグ (A/B) 回路及び特別管理回路に使用する時に適用すること。

NOTES

1. MATERIAL:COPPER ALLOY t=0.25
2. APPLICABLE WIRE SEAL NO. :7158-3030-50 ETC.
3. MATING TERMINAL NO. : 7114-4102-08 ETC.
⑤4. ( ) PART NO. IS USED FOR PARTS ASSOCIATED WITH A/B CIRCUITS OR OTHER SPECIFIED CIRCUIT.

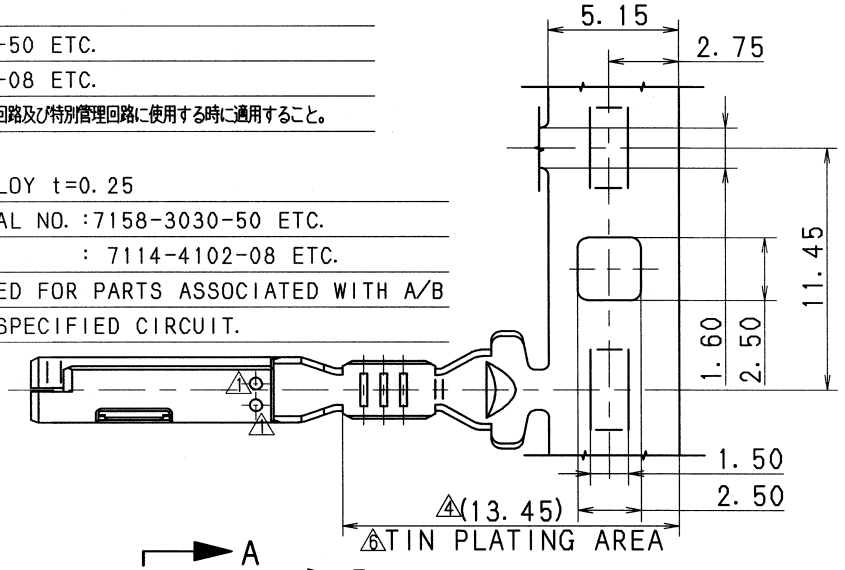

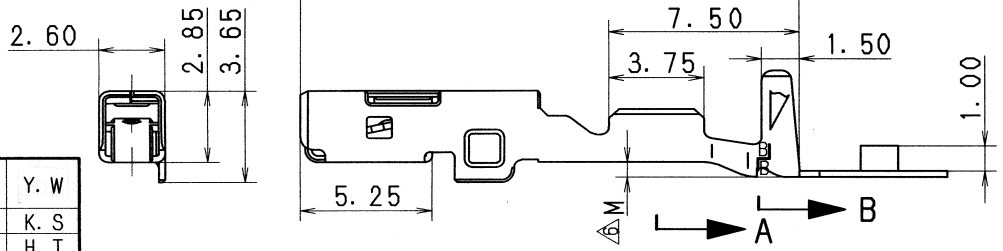

LET	DATE	REVISION RECORD	NO.	CHKD
⑥	05/12/14	DELETED SOLDER PLATING INSTRUCTION, ETC.	C05-ZG57	Y.W
⑤	05/02/09	ADDED A/B PART NO., ETC.	C05-Z309	K.S
④	03/09/19	ADDED DIMENSION,B	C03-X584	H.T
③	03/07/10	CHANGED WIRE SIZE	C03-X450	K.O
②	99/06/15	CORRECT ALL ERRORS,A	C99-L931	H.O
①	98/09/06	CHANGED FORM	C98-M209	Y.T
	96/01/25	NEW	C96-6051	Y.T

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS g

ISSUE MARK

CUSTOMER		
CUSTOMER PART NO.	CUSTOMER DWG NO.	
OFFICE	TRIAL PART NO.	
VENDOR		
VENDOR NO.		

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	96/01/25	mm	5:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
	和田	酒井	Y. TOMITA	O. DAR
'05.12.22	'05.12.22	'05.12.21	96/01/25	05/12/14

MATL. SPEC.	SEE NOTES	TREAT. & FIN.	
NAME	1.5 SYSTEM SEALED CONNECTOR FEMALE TERMINAL (GOLD PLATED)		
PART NO. CH. CODE	7116-4102-08 ETC.		
DWG NO.	7116-4102-08:R	SET DWG NO.	
YAZAKI CORPORATION			