

SEC. B-B



SEC. C-C



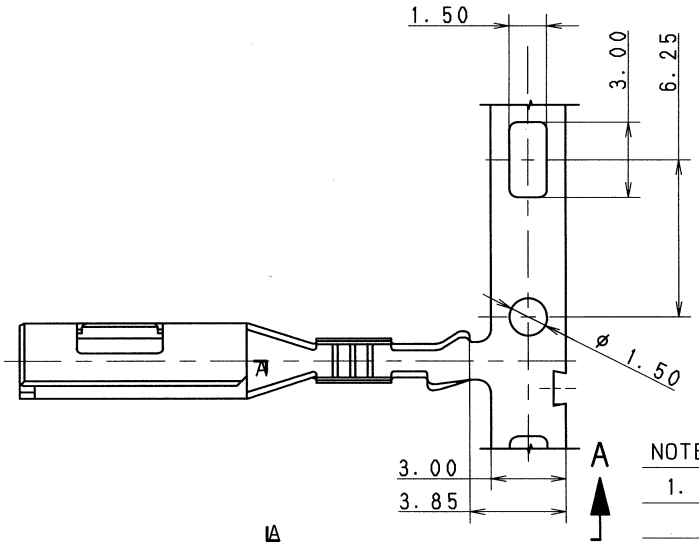

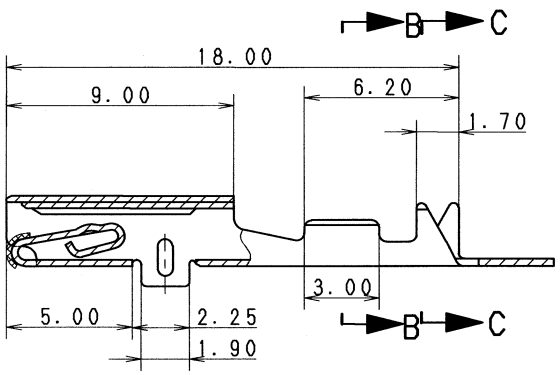

SEC. A-A

注 記

1. 材質:
   BRASS t=0.25$^{0}_{-0.02}$
   処理:
   ニッケル下地めっき 1.0μm以上
   金めっき 0.38μm以上
   金フラッシュめっき (重量比99.7~99.9%) 0.1$^{+0.05}_{-0.02}$μm
   錫めっき 1.0μm以上
2. 適用電線サイズは、CHFUS 0.22~HFSS 0.35とする。
3. 相手端子品番 : 7114-4052-08, 7114-4624-08

NOTES

1. MATERIAL: BRASS t=0.25$^{0}_{-0.02}$
   TREATMENT:
   NICKEL UNDERPLATING: t=1.0μm MIN.
   GOLD PLATING: t=0.38μm MIN.
   GOLD FLASH PLATING: t=0.1$^{+0.05}_{-0.02}$μm
   (GOLD WEIGHT PERCENT: 99.7~99.9%)
   TIN PLATING: t=1.0μm MIN.
2. APPLICABLE WIRE SIZE: CHFUS 0.22~HFSS 0.35
3. MATING PART NO. : 7114-4052-08 , 7114-4624-08

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
	2007/06/05	NEW	C07-Z518	H. I

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS g

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	2007/06/05	mm	5/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
川津	三輪	—	T. HASEGAWA	C. REPOLLO 石田
'07.06.06	'07.06.05		2002/07/30	2007/06/05

MATL. SPEC. SEE NOTES | TREAT. & FIN. SEE NOTES

NAME 2.3Ⅱ TERMINAL FEMALE (GOLD PLATING)

PART NO. 7116-4624-08 (7B16-4624-08)

CH. CODE

DWG NO. 7116-4624-08 : R | SET DWG NO.

YAZAKI CORPORATION