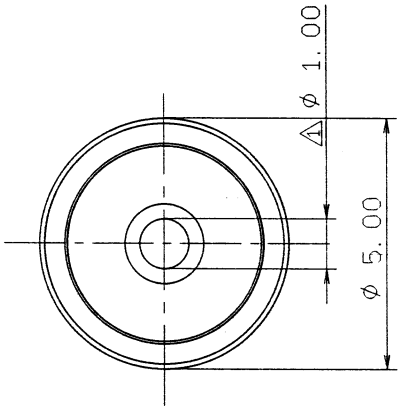

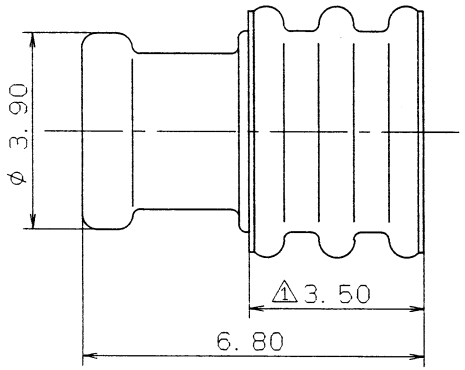

RUBBER PART GENERAL TOLERANCE			
PART DIM.	1	2	③
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

⚠1 NOTES

1. APPLICABLE WIRE SIZE
   :AVS 0.2H~0.3sq
   :CAVS 0.3~0.5sq
   :CAVUS 0.85sq (EQUIVALENT)
2. APPLICABLE TERMINAL NO.
   :7114-1304, 7116-1304 ETC.
3. APPLICABLE HOUSING NO.
   :7222-7780-40, 7123-7780-40 ETC.
4. MATERIAL : SELF-LUBRICATION SILICONE RUBBER (LIGHT BLUE)
⚠3 5. ( )PART NO. TO BE USED AIR-BAG SYSTEM AND ADMINISTRATION SYSTEM.

⚠1 注 記

1. 適用電線サイズ : AVS 0.2H~0.3sq
   :CAVS 0.3~0.5sq
   :CAVUS 0.85sq 相当
2. 適用端子品番 : 7114-1304, 7116-1304 他
3. 適用ハウジング品番 : 7222-7780-40,
   7123-7780-40 他
4. 材料 : 含油シリコンゴム (薄青)
⚠3 5. エアバッグ回路及び特別管理回路で使用する場合は, ( )内品番を適用する事。

LET	DATE	REVISION RECORD	NO.	CHKD
⚠3	97.03.25	ADDED A/B PART NO.	C97-L559	M.T
⚠2	94.09.20	CHANGED GRADE OF MATERIAL. A	C94-L630	S.K
⚠1	93.12.20	RENEW	C93-7169	H.K
	87.10.29	NEW	7MC-0697	I.O

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED GENERAL TOLERANCE 3

MASS g

CUSTOMER
CUSTOMER PART NO. | CUSTOMER DWG NO.
OFFICE | TRIAL PART NO.
VENDOR
VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	RENEW	87.10.29	mm	10/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
神田 92.04.01		濱辺 97.3.31	K. ABE 93.12.20	KUROSAWA 97.03.25

ISSUE MARK

MATL. SPEC. SEE NOTES | TREAT. & FIN.

NAME WIRE SEAL FOR Z-TYPE

PART NO. ⚠3 7157-3790-90 A (7B57-3790-90)
CH. CODE

DWG NO. 7157-3790-90 : R | SET DWG NO.

YAZAKI CORPORATION