RUBBER PART GENERAL TOLERANCE			
PART DIM.	1	2	③
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

注記

1.適用ハウジング品番 : 7182-8710-30~7182-8780-30

: 7283-8710-30~7283-8780-30

△2 2.材質 : シリコンゴム (ベンガラ)

NOTES

1.APPLICABLE HOUSING NO.: 7182-8710-30~7182-8780-30

: 7283-8710-30~7283-8780-30

△2 2.MATERIAL : SILICONE RUBBER (RED IRON)

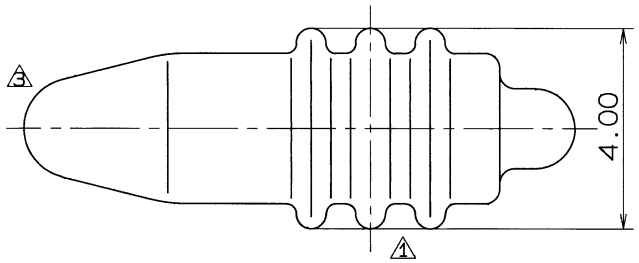

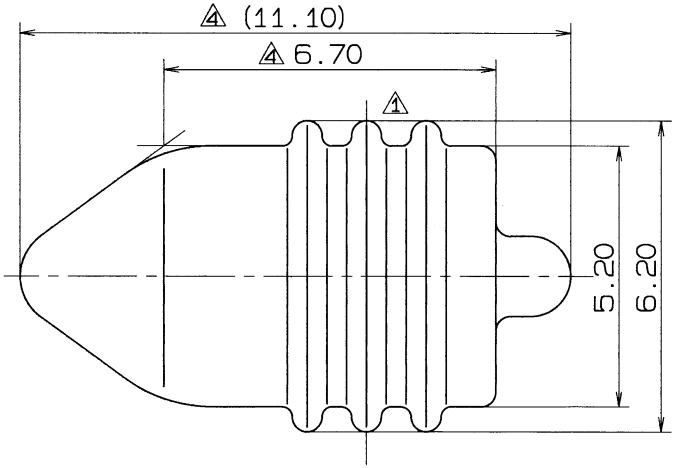

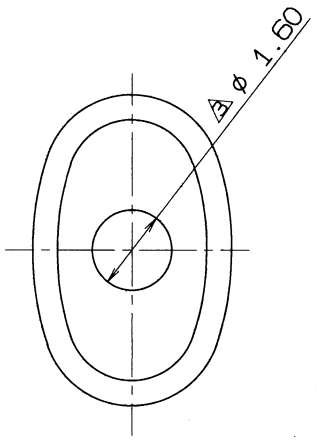

LET	DATE	REVISION RECORD	NO.	CHKD
△4	95.12.13	CHANGED FORM	C95-N069	H.K
△3	95.10.04	CHANGED FORM, B	C95-M607	Y.Y
△2	95.03.06	CHANGED COLOR, A	C95-L456	K.S
△1	92.10.07	CHANGED FORM & RENEW	C92-6992	M.A
	90.09.25	NEW	C90-L993	S.I

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.45

SPECIFIED

MASS g

ISSUE MARK

CUSTOMER		
CUSTOMER PART NO.		CUSTOMER DWG NO.
OFFICE		TRIAL PART NO.
VENDOR		
VENDOR NO.		

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	90.08.03	mm	10/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
95.12.19	95.12.18	95.12.18	ISHIZUKA 90.08.03	SATOH 95.12.13

MATL. SPEC.	SEE NOTES	TREAT. & FIN.
NAME	SSD CONNECTOR	
	PLUGGING RUBBER STOPPER	
PART NO. CH.CODE	△7157-3952-80, B	
DWG NO.	△7157-3952-80: R	
	YAZAKI CORPORATION	