RUBBER PART GENERAL TOLERANCE			
PART DIM.	1	2	③
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

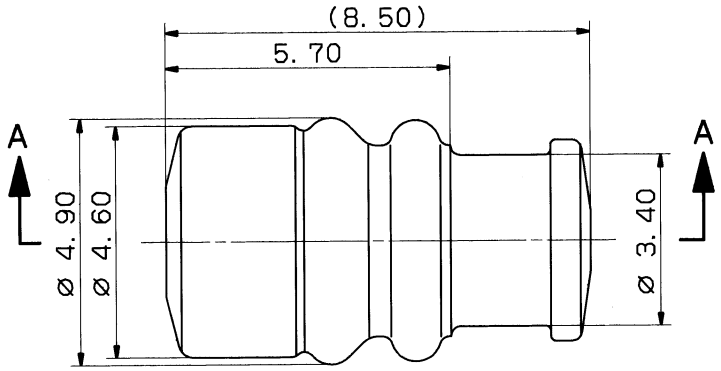



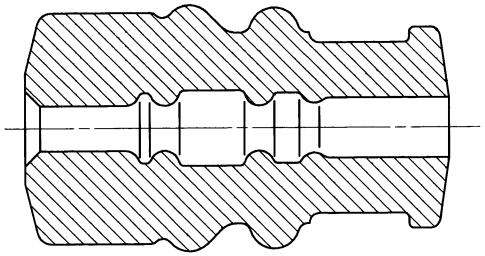

SEC. A-A

NOTE

1. APPLICABLE WIRE SIZE : NOMINAL DIAMETER OF FINISHED CABLE ø1.40~ø1.80
(EXCEPT 0.3mm² WIRE:WHICH STANDARD OUTER DIAMETER IS MORE AND EQUAL THAN ø1.8)

注記

1. 適用電線サイズ : 標準仕上り外径 ø1.40~ø1.80とする。
(呼び0.3mm²で標準仕上り外径ø1.8以上は除く)

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
	95.11.02	NEW	C95-M403	K.O

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED

MASS g

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	95.11.02	mm	10/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
	稲葉	山田 鈴木 堀田	MAEDA	SAMUKAWA
95.11.13	95.11.09	95.11.08	94.09.27	95.11.02

MATL. SPEC. SILICONE RUBBER (BLUE) | TREAT. & FIN.

NAME 090Ⅱ 5mm pitch RUBBER STOPPER (S SIZE)

PART NO. 7158-3003-90
CH. CODE

DWG NO. 7158-3003-90:R

YAZAKI CORPORATION