


1

2

3

STD LIB-SW2016

RUBBER PART GENERAL TOLERANCE			
PART DIM.		1	2
		③	
0	T0	3	±0.2 ±0.3 ±0.4
3	T0	6	±0.2 ±0.4 ±0.5
6	T0	10	±0.3 ±0.5 ±0.6
10	T0	18	±0.3 ±0.6 ±0.8
18	T0	30	±0.4 ±0.8 ±1.0
30	T0	50	±0.5 ±1.0 ±1.5
50	T0	80	±0.6 ±1.2 ±2.0
80	T0	120	±0.7 ±1.4 ±2.5
120	T0	180	±0.8 ±1.6 ±3.0
180	T0	250	±1.0 ±2.0 ±4.0
250	T0	315	±1.2 ±2.5 ±5.0
315	T0	400	±1.5 ±3.0 ±6.0
400	T0	500	±1.8 ±3.5 ±7.0
500	OVER		±0.4 % ±0.8 % ±1.5 %

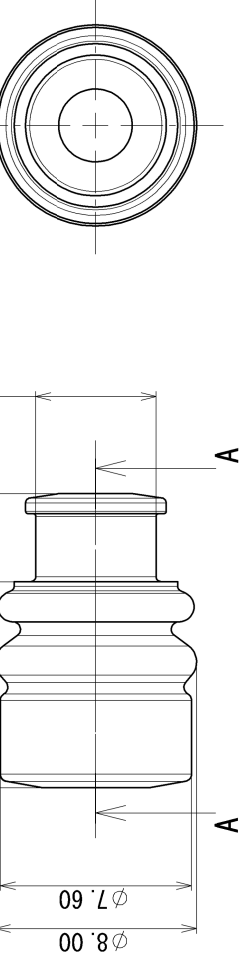

注記

1. 適用電線サイズ : AVS/AVX/HF 3.0

NOTE

1. APPLICABLE WIRE SIZE : AVS/AVX/HF 3.0

SEC. A-A

CUSTOMER		MATERIAL		TREAT.	
CUSTOMER PART NO.		SILICONE RUBBER		& FIN.	
CUSTOMER DWG NO.		(BLACK)			
OFFICE		NAME		4.8 RUBBER STOPPER (LL SIZE)	
VENDOR		TRIAL PART NO. or PRODUCT NO.			
VENDOR NO.					
DWG TYPE		DWG DATE		PART NO.	
R		1995/08/03		7158-3017	
APPROVED		CHECKED		CH. CODE	
N. TAGUCHI		MAEDA		DWG NO.	
2018/09/28		1994/09/27		7158-3017:R	
2018/09/28		2018/09/28		SET DWG NO.	
2018/09/28		2018/09/28		Y. MAEDA	
2018/09/28		2018/09/28		YAZAKI Corporation	
2018/09/28		2018/09/28		A3	