



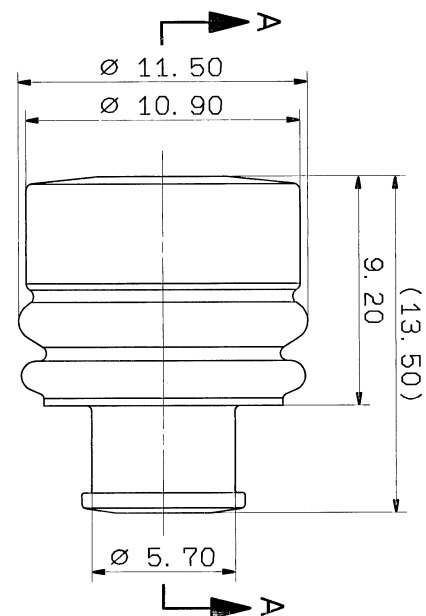

| RUBBER PART GENERAL TOLERANCE |         |         |         |  |
|-------------------------------|---------|---------|---------|--|
| PART DIM.                     | 1       | 2       | ③       |  |
| 0 TO 3                        | ± 0.2   | ± 0.3   | ± 0.4   |  |
| 3 TO 6                        | ± 0.2   | ± 0.4   | ± 0.5   |  |
| 6 TO 10                       | ± 0.3   | ± 0.5   | ± 0.6   |  |
| 10 TO 18                      | ± 0.3   | ± 0.6   | ± 0.8   |  |
| 18 TO 30                      | ± 0.4   | ± 0.8   | ± 1.0   |  |
| 30 TO 50                      | ± 0.5   | ± 1.0   | ± 1.5   |  |
| 50 TO 80                      | ± 0.6   | ± 1.2   | ± 2.0   |  |
| 80 TO 120                     | ± 0.7   | ± 1.4   | ± 2.5   |  |
| 120 TO 180                    | ± 0.8   | ± 1.6   | ± 3.0   |  |
| 180 TO 250                    | ± 1.0   | ± 2.0   | ± 4.0   |  |
| 250 TO 315                    | ± 1.2   | ± 2.5   | ± 5.0   |  |
| 315 TO 400                    | ± 1.5   | ± 3.0   | ± 6.0   |  |
| 400 TO 500                    | ± 1.8   | ± 3.5   | ± 7.0   |  |
| 500 OVER                      | ± 0.4 % | ± 0.8 % | ± 1.5 % |  |


## 法記

1. 適用電線サイズ : 標準仕以外径 Ø4. 40とする。

## NOTE

1. APPLICABLE WIRE SIZE : NOMINAL DIAMETER OF

FINISHED CABLE Ø4. 40.



## SEC. A-A

|            |        |                                          |          |        |        |                   |        |                  |                |                           |        |               |                    |                    |                                                |  |
|------------|--------|------------------------------------------|----------|--------|--------|-------------------|--------|------------------|----------------|---------------------------|--------|---------------|--------------------|--------------------|------------------------------------------------|--|
| 95. 10. 23 |        | NEW, <input checked="" type="checkbox"/> | C95-M403 |        | K. O   | CUSTOMER PART NO. |        | CUSTOMER DWG NO. |                | MATERIAL: SILICONE RUBBER |        | TREAT. & FIN. |                    | ISSUE MARK         |                                                |  |
| LET DATE   |        | REVISION RECORD                          |          | NO.    |        | CHKD              | OFFICE |                  | TRIAL PART NO. |                           | NAME   |               | 312 RUBBER STOPPER |                    | (2L SIZE)                                      |  |
| 10MAX      |        | 50MAX                                    | 100MAX   | 250MAX | 250QVR | ANGLE             | ECCENT | DWG TYPE         | DWG SOURCE     | DWG DATE                  | UNIT   | SCL           | ANGLE              | PART NO.           | 7158-3023, <input checked="" type="checkbox"/> |  |
| A          | ±0. 15 | ±0. 2                                    | ±0. 3    | ±0. 5  | ±0. 75 | ±30'              | 0. 1   | R                | NEW            | 95. 10. 23                | mm     | 5/1           | 3                  | CH. CODE           | 7158-3023:R                                    |  |
| B          | ±0. 2  | ±0. 3                                    | ±0. 55   | ±0. 95 | ±1. 4  | ±30'              | 0. 1   | APPROVED         | CHECKED        | CHECKED                   | DESIGN | DRAWN         |                    | DWG NO.            | 7158-3023:R                                    |  |
| C          | ±0. 3  | ±0. 5                                    | ±0. 8    | ±1. 4  | ±2     | ±30'              | 0. 15  | MAEDA            | SAMUKAWA       |                           |        |               |                    | YAZAKI CORPORATION |                                                |  |
| SPECIFIED  |        | MASS                                     |          | 9      |        | 95. 11. 13        |        | 95. 10. 31       |                | 95. 10. 10                |        | 94. 09. 15    |                    | 95. 10. 23         |                                                |  |