
注記

1. 適用電線サイズ:標準仕上上り外形φ5.85～6.50とする。

NOTE

1. APPLICABLE WIRE SIZE : NOMINAL DIAMETER OF FINISHED CABLE φ5.85～6.50.

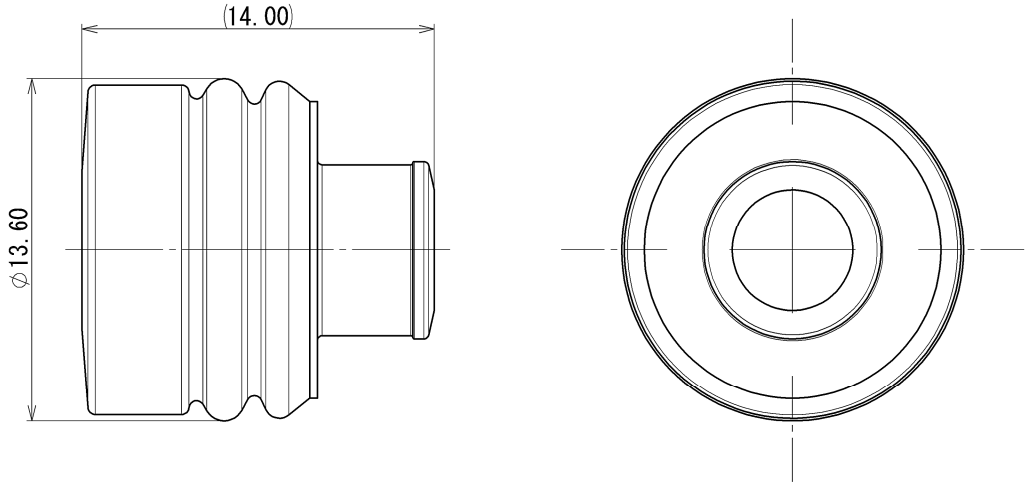

RUBBER PART GENERAL TOLERANCE.			
PART DIM.	1	2	③
0 TO 3	±0.2	±0.3	±0.4
3 TO 6	±0.2	±0.4	±0.5
6 TO 10	±0.3	±0.5	±0.6
10 TO 18	±0.3	±0.6	±0.8
18 TO 30	±0.4	±0.8	±1.0
30 TO 50	±0.5	±1.0	±1.5
50 TO 80	±0.6	±1.2	±2.0
80 TO 120	±0.7	±1.4	±2.5
120 TO 180	±0.8	±1.6	±3.0
180 TO 250	±1.0	±2.0	±4.0
250 TO 315	±1.2	±2.5	±5.0
315 TO 400	±1.5	±3.0	±6.0
400 TO 500	±1.8	±3.5	±7.0
500 OVER	±0.4 %	±0.8 %	±1.5 %

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
	2016/11/11	NEW	C16-P423	Y.H

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED

MASS

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	2016/11/11	mm	5:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
T.MATSUNAGA	K.IKEYA	———	K.IKEYA	Y.HANAI
2016/11/11	2016/11/11	———	2016/09/23	2016/11/11

MATL. SPEC. SILICONE RUBBER (BLUE)

TREAT. & FIN.

NAME 375 TYPE RUBBER STOPPER (LL SIZE)

PART NO. 7158-3723-90

CH. CODE

DWG NO. 7158-3723-90:R

SET DWG NO.

YAZAKI CORPORATION