


注記

1. 嵌合相手品番は7281-6060-30である。
2. 受・送信モジュールに静電気、衝撃を与えない様に注意する事。

NOTES

1. THE ASSEMBLY SHALL BE JOINTED TO PART 7281-6060-30
2. STATIC ELECTRICITY SHALL NOT BE OCCURRED IN OR SHOCK SHALL NOT BE GIVEN TO RECEIVER/TRANSMITTER MODULES.

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	PART NAME	MATERIAL	COLOR	QTY.
7281-6154-30	①	7181-6151-30	2+0 HEADER CONNECTOR HOUSING TYPE-H2	PBT-G	BLACK	1
	②	7181-9154-02	SHIELD CASE TYPE-H2	BRASS		1
	③	7173-0021	LENS SLEEVE TYPE-H3	COC	CLEAR	2
	④	7G9740011	FOT Tx FOR 2+0 TYPE-H(TSS.0)			1
	⑤	7G9740010	FOT Rx FOR 2+0 TYPE-H(TSS.0)			1
	⑥	7181-9158	DUST CAP FOR M TYPE2	ELASTOMER	NATURAL	1

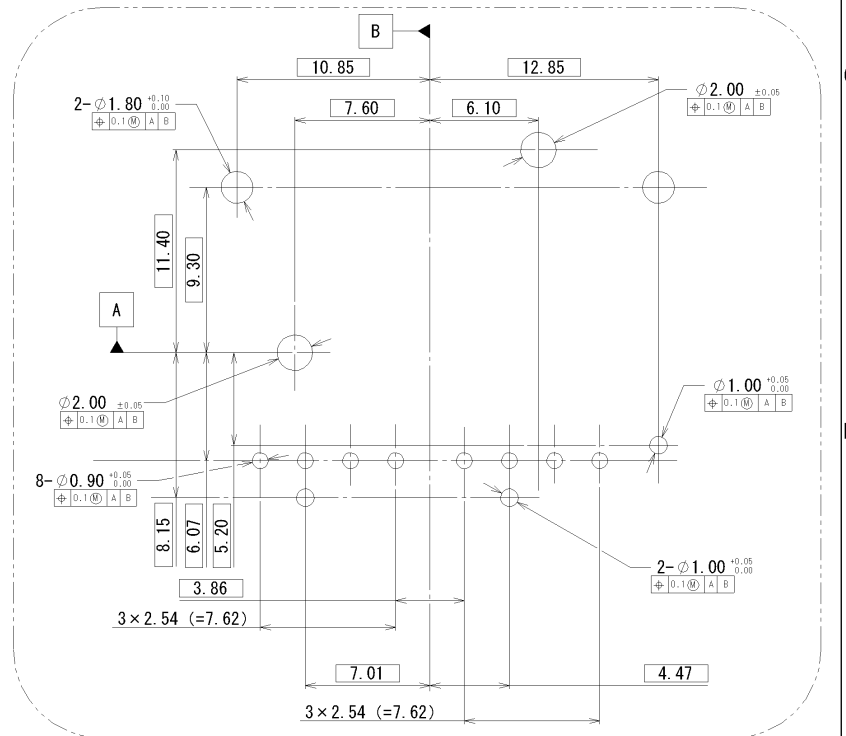

SOLDERING FACE (BOTTOM VIEW) (5/1)

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30°
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°
(C)	±0.3	±0.5	±0.8	±1.4	±2	±30°
SPECIFIED					MASS	g

CUSTOMER	MATL. SPEC.	SEE TABLE	TREAT. & FIN.
CUSTOMER PART NO.	CUSTOMER DWG NO.	NAME MOST 2+0 HEADER CONNECTOR TYPE-H3	
OFFICE	TRIAL PART NO.	PART NO. CH. CODE	7281-6154-30
VENDOR	VENDOR NO.	DWG NO.	7281-6154-30:R
DWG TYPE	DWG SOURCE	DWG DATE	06/08/24
R	NEW	UNIT	mm
APPROVED	CHECKED	CHECKED	DESIGN
T. OSHIMA	T. KUDO	M. OZAKI	M. OZAKI
06/11/02	06/11/02	06/11/02	06/11/02
SPECIFIED		DRAWN	T. KUDO
		06/11/02	
YAZAKI CORPORATION			

06/11/02	NEW	C06-P954	T. K
LET DATE	DEVISION RECORD	NO.	CHKD