

GENERAL TOLERANCE									
10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE
A ±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±2.5	±3°
B ±0.2	±0.3	±0.55	±0.95	±1.4					0.1
③ ±0.3	±0.5	±0.8	±1.4	±2					±3°
									0.15




SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7282-9072-80	①	7182-9072-80	PBT-6	BROWN	1
	②	7158-6612	PBT-6	NATURAL	1

注記

1. 嵌合相手品番 : 7283-9078-80
2. 適応端子品番 : 7114-4618-02 ETC.

NOTES

1. MATING PART NO. : 7283-9078-80.
2. APPLICABLE TERMINAL NO. : 7114-4618-02 ETC.

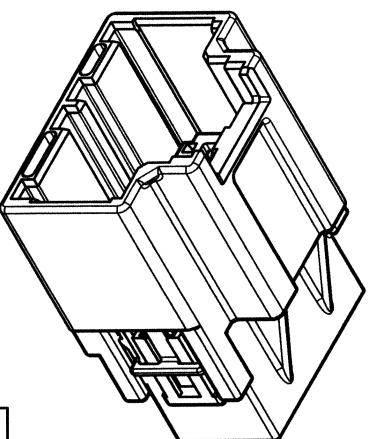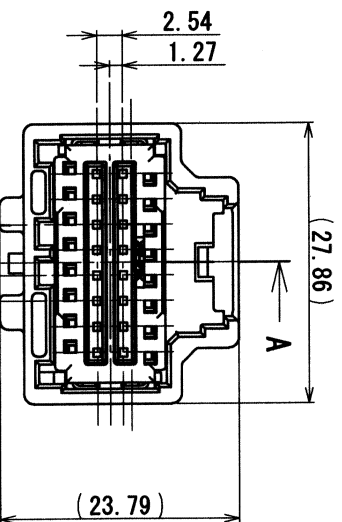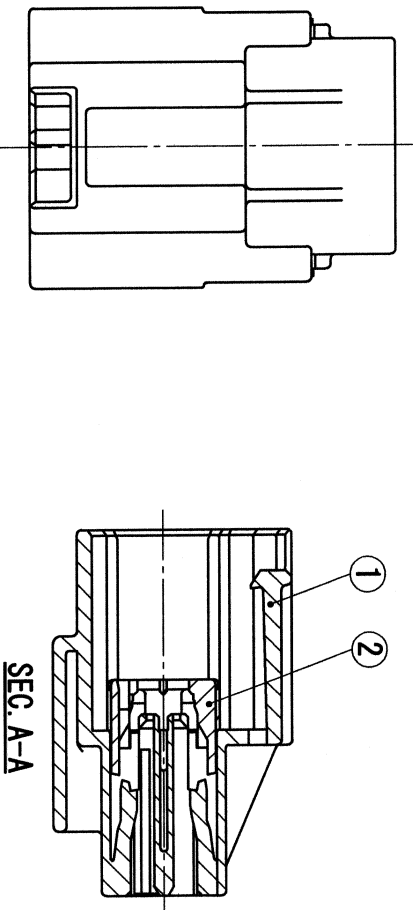

CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATERIAL SPEC.		TREAT. & FIN.		ISSUE MARK	
04.07.15		NEW		C04-2732		T.M		NAME		KAIZEN O.64 SYSTEM UNSEALED	
DATE		REVISION RECORD		NO.		CHKD		TRIAL PART NO.		CONNECTOR 16P (M) SUB ASSEMBLY	
GENERAL TOLERANCE											
10MAX		50MAX		100MAX		250MAX		250OVR		ANGLE	
A ±0.15		±0.2		±0.3		±0.5		±0.75		O.1	
B ±0.2		±0.3		±0.55		±0.95		±1.4		O.1	
C ±0.3		±0.5		±0.8		±1.4		±2		O.15	
SPECIFIED				MASS		8					
DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE	
R		NEW		04.07.15		mm		2/1		3	
APPROVED		CHECKED		CHECKED		DESIGN		DRAWN			
S. Iwano		M. Wada		T. Miyakawa		J. GAVILANGA		POWER GAVILANGA			
04.2.15		04.2.15		04.07.15		03.11.21		04.07.15			
1		2		3							