


TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7283-1288 ETC.	① SEE TABLE 2	PBT	SEE TABLE 2	1
	② 7158-5166 (7B58-5166)	PBT	NATURAL	1
	③ 7137-2676-60 (7B37-2676-60)	△ SILICONE RUBBER	△ LIGHT GREEN	1

TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
△ 7283-1288-10	7183-1288 (7B83-1288)	NATURAL
△ 7283-1288-30	7183-1288-10	DARK GRAY
△ 7283-1288-40	7183-1288-30 (7B83-1288-30)	BLACK
△ 7283-1288-50	7183-1288-40	LIGHT GRAY
△ 7283-1288-51	7183-1288-50	ORANGE
△ 7283-1288-51	7183-1288-51	SAE ORANGE

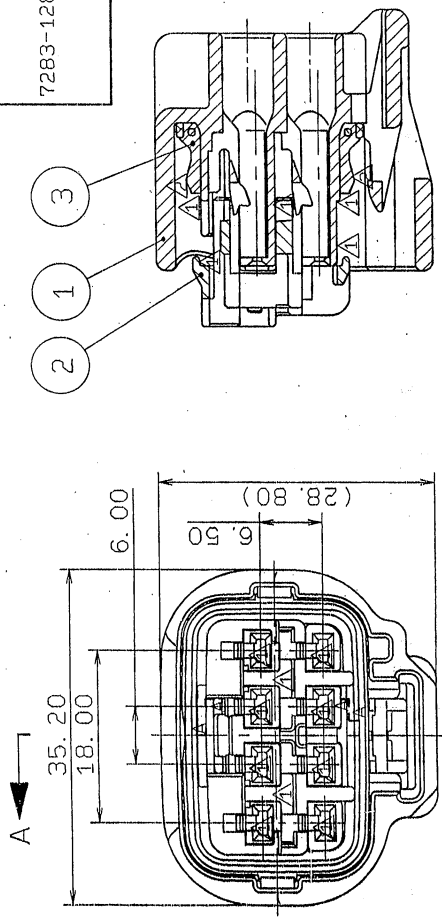

SEC. A-A

- 注記
1. 適用端子品番 : 7116-4025 ETC.
 2. 適用加工品番 : 7158-3006-90 ETC.
 3. 適合相手品番 : 7282-1288 ETC.
 4. ()内品番は、A/B回線及び、特別管理回路に使用すること。

- NOTES
1. APPLICABLE TERMINAL PARTS NO. : 7116-4025 ETC.
 2. APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.
 3. MATING PART NO. : 7282-1288 ETC.
 4. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITOR.

△ 99.06.28	CHANGED FORM & PART NO.	C99-M059	C. T
△ 98.12.04	CHANGED FORM, MATERIAL, COLOR & ADDED A/B PART NO., NOTE & ELIMINATED COLOR NO. ()	C98-N059	S. S
98.01.28	REVISION RECORD	C98-L143	Y. M
LET	DATE	NO.	CHKD
GENERAL TOLERANCE			
10MAX	50MAX	100MAX	250MAX
A ±0.15	±0.2	±0.3	±0.5
B ±0.2	±0.3	±0.55	±0.95
(C) ±0.3	±0.5	±0.8	±1.4
MASS			
SPECIFIED			
CUSTOMER		CUSTOMER PART NO.	CUSTOMER DWG NO.
OFFICE		OFFICE	TRIAL PART NO.
VENDOR		VENDOR NO.	
DWG TYPE		DWG SOURCE	DWG DATE
R	NEW	NEW	98.01.28
APPROVED	CHECKED	DESIGN	DRAWN
加藤 稔	山梨 稔	OCUMURA	KIKUCHI
99.07.13	99.07.09	99.07.07	99.06.28
MATERIAL SPEC.		NAME	
SEE TABLE 1		090II 8P SEALED CONNECTOR	
TREAT. & FIN.		HOUSING FEMALE SUB ASSEMBLY	
PART NO. CH. CODE		PART NO. CH. CODE	
7283-1288 ETC. (7C83-1288 ETC.)		7283-1288 ETC. (7C83-1288 ETC.)	
DWG NO.		DWG NO.	
7283-1288 : R		7283-1288 : R	
SET DWG NO.		SET DWG NO.	
		YAZAKI CORPORATION	
ISSUE MARK			