
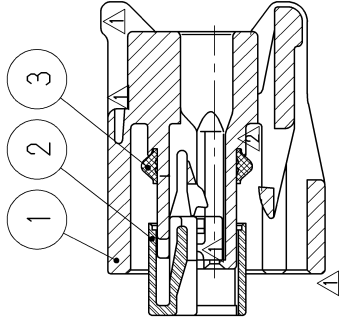


3

2

1

| SUB ASSEMBLY PART NO.<br>AND CH. CODE |  | PART NO.<br>AND CH. CODE | △PART NAME                    | MATERIAL        | COLOR   | QTY. |
|---------------------------------------|--|--------------------------|-------------------------------|-----------------|---------|------|
| 7283-1968-30B                         |  | ① 7183-1968-30           | 2.3Ⅱ 6P SEALED HOUSING FEMALE | PBT             | BLACK   | 1    |
|                                       |  | ② 7158-4364              | 2.3Ⅱ 6P SEALED SPACER FEMALE  | PBT             | NATURAL | 1    |
|                                       |  | ③ 7137-2665-80           | 2.3Ⅱ 6P SEALED PACKING        | SILICONE RUBBER | BROWN   | 1    |

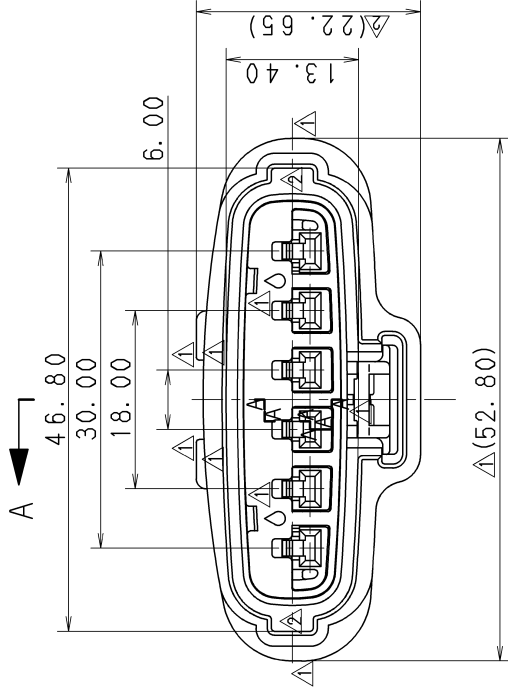


SEC. A-A

注記

△ 1. 取扱説明書 No. YPES-15-222, YPES-15-119

NOTE

△ 1. HANDLING MANUAL NO. YPES-15-222, YPES-15-119

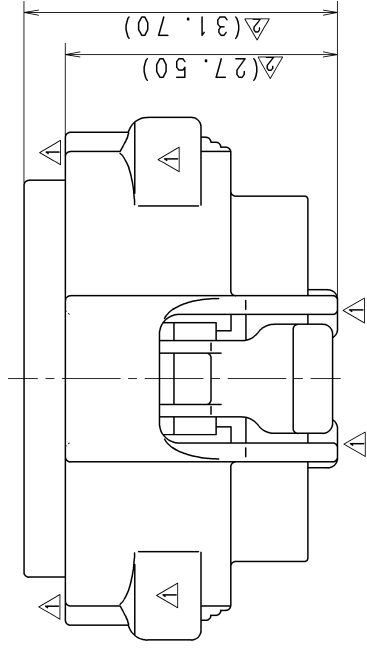

| CUSTOMER          |  |            |  |          |  |              |  |          |  | MATERIAL SPEC.   |  | SEE TABLE       |  | TREAT. & FIN.  |  | ISSUE MARK          |  |
|-------------------|--|------------|--|----------|--|--------------|--|----------|--|------------------|--|-----------------|--|----------------|--|---------------------|--|
| CUSTOMER PART NO. |  |            |  |          |  |              |  |          |  | CUSTOMER DWG NO. |  |                 |  |                |  |                     |  |
| OFFICE            |  |            |  |          |  |              |  |          |  | TRIAL PART NO.   |  |                 |  | NAME           |  | SUB ASSEMBLY FEMALE |  |
| VENDOR            |  |            |  |          |  |              |  |          |  |                  |  |                 |  |                |  |                     |  |
| VENDOR NO.        |  |            |  |          |  |              |  |          |  |                  |  |                 |  |                |  |                     |  |
| DWG TYPE          |  | DWG SOURCE |  | DWG DATE |  | UNIT         |  | SCL      |  | ANGLE            |  | PART NO.        |  | CH. CODE       |  | DWG NO.             |  |
| R                 |  | NEW        |  | 97.03.03 |  | mm           |  | 2/1      |  | 3                |  | 7283-1968-30, B |  |                |  |                     |  |
| APPROVED          |  | CHECKED    |  | CHECKED  |  | DESIGN       |  | DRAWN    |  |                  |  | DWG NO.         |  | 7283-1968-30:R |  | SET DWG NO.         |  |
| M. FUKUDA         |  |            |  | T. HAMAI |  | H. TAKAHASHI |  | J. CANDO |  |                  |  |                 |  |                |  |                     |  |
| 11.03.24          |  |            |  | 11.03.24 |  | 96.10.29     |  | 11.03.24 |  |                  |  |                 |  |                |  | YAZAKI CORPORATION  |  |
| GENERAL TOLERANCE |  |            |  |          |  |              |  |          |  |                  |  |                 |  |                |  |                     |  |
| 10MAX             |  | 50MAX      |  | 100MAX   |  | 250MAX       |  | 2500VR   |  | ANGLE            |  | ECCENT          |  |                |  |                     |  |
| A ±0.15           |  | ±0.2       |  | ±0.3     |  | ±0.5         |  | ±0.75    |  | ±30'             |  | 0.1             |  |                |  |                     |  |
| B ±0.2            |  | ±0.3       |  | ±0.55    |  | ±0.95        |  | ±1.4     |  | ±30'             |  | 0.1             |  |                |  |                     |  |
| C ±0.3            |  | ±0.5       |  | ±0.8     |  | ±1.4         |  | ±2       |  | ±30'             |  | 0.15            |  |                |  |                     |  |
| SPECIFIED         |  |            |  |          |  |              |  |          |  | MASS             |  |                 |  |                |  |                     |  |