



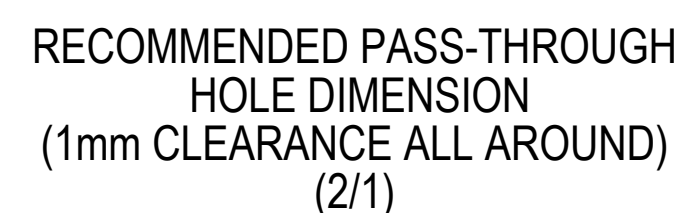


7283-4490-30, ETC.
KEYWAY A



NOTES:

1. PARTS MUST BE PURCHASED FROM YAZAKI.
2. PARTS MUST BE FREE OF FLASH AND IMPERFECTIONS THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: SEE 7116-4618-02:R DRAWING (0.64mm KAIZEN UNSEALED)
MAX WIRE OD: 1.90mm (2-7, 9-14)
SEE 12191810 DRAWING (1.5mm APITV GT UNSEALED)
MAX WIRE OD: 2.25mm (1,8)
4. PART DESIGNED TO MEET USCAR INTERFACE: 999-U-014-2-Z01
5. PART SATISFIES USCAR-2, REVISION 3, DATED APRIL 2001, (T2/m1/S1) WITH THE FOLLOWING EXCEPTIONS:
5.4.2 HOUSING LOCK FORCE TO SERVICE= 7.6N-70N
6. PART TO COMPLY WITH YPES-31-038 REQUIREMENTS.
7. THIS DIMENSION SHOWS THE PRE-SET POSITION OF THE TPA.
8. THIS DIMENSION SHOWS THE PRE-SET POSITION OF THE CPA.
9. THIS DRAWING IS TO BE USED FOR INTERNAL YAZAKI PSW SUBMISSION.
10. HANDLING MANUAL NUMBER: YPES-15-711E
11. CONNECTOR IS CAPABLE OF ACCEPTING A DRESS COVER.



CAVITY *

CAVITY 8

CAVITY 1

-	09-04-2018	NEW	C18-A843	S.A.
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE												ANGLE	ECCEN
	10MAX	50MAX	100MAX	250MAX	250OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR				
A	±0.15	±0.20	±0.30	±0.50	±0.75						±3°	0.1	
B	±0.20	±0.30	±0.55	±0.95	±1.40	±0.20	±0.30	±0.50	±2.50		±3°	0.1	
Ⓒ	±0.30	±0.50	±0.80	±1.40	±2.00						±3°	0.15	
SPECIFIED												MASS	SEE TABLE

CUSTOMER							MATL. SPEC.			SEE TABLE		TREAT. & FIN.		N/A								
CUSTOMER PART NO.				CUSTOMER DWG NO.			NAME								14P (12P 0.64mm YESC KAIZEN + 2P 1.5mm GT)							
OFFICE YNA				TRIAL PART NO.			UNSEALED FEMALE CONNECTOR SUB-ASSEMBLY								PART NO. CH. CODE				7283-4490-30, ETC.			
VENDOR																						
VENDOR NO.							DWG NO.								7283-4490-30:R							
DWG TYPE		DWG SOURCE		DWG DATE		UNIT													SCL		ANGLE	
R		7283-4490-30:M		09-04-2018		mm		5/1		3		YAZAKI CORPORATION										
APPROVED		CHECKED		CHECKED		DESIGN		DRAWN														
						BOBBY KIM		SAUL AMPARAN														
						11-20-2003		01-08-2019														

ISSUE MARK

	A
--	---