

1

2



3

TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
△7283-7020-10 ETC.	① SEE TABLE 2	PBT	SEE TABLE 2	1
	② 7157-4103	PBT	NATURAL	1
	③ 7137-2211-80	△SILICONE RUBBER	RED IRON	1

TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
△7283-7020	7183-7020	NATURAL
△7283-7020-10	7183-7020-10	DARK GRAY
△7283-7020-30	7183-7020-30	BLACK
△7283-7020-40	7183-7020-40	LIGHT GRAY
△7283-7020-50	7183-7020-50	ORANGE
△7283-7020-60	7183-7020-60	GREEN
△7283-7020-80	7183-7020-80	BROWN
△7283-7020-90	7183-7020-90	BLUE

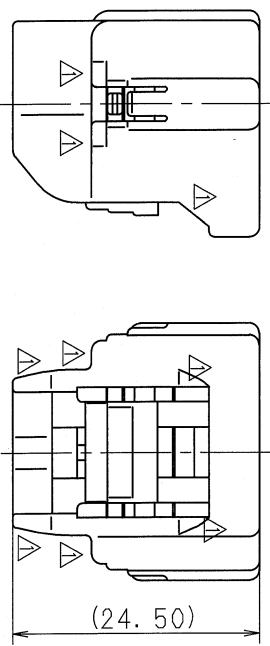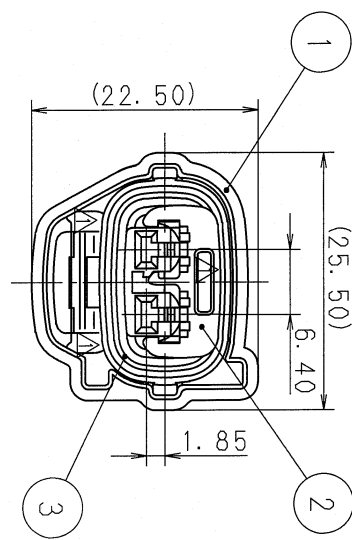

- 注記
- 1) 適用端子品番 : 7116-4025 ETC.
 - 2) 嵌合相手品番 : 7282-7020-10 ETC.
 - 3) 適用工口絶品番 : 7158-3006-90 ETC.

NOTES

- 1) APPLICABLE TERMINAL NO. : 7116-4025 ETC.
- 2) MATING PART NO. : 7282-7020-10 ETC.
- 3) APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.

△	02. 09. 03	CHANGED NDTE & PART NAME	C02-Y002	J. S	CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.	MATL. SPEC.	SEE TABLE 1	TREAT. & FIN.	ISSUE MARK	
△	96. 10. 01	ADDED PART NO.	C96-M766	M. T								
△	89. 08. 19	CHANGED FORM & RENEW	C89-L863	M. T								
△	89. 02. 22	NEW	C89-L377	T. M	OFFICE	TRIAL PART NO.		NAME△2. 3I (090II) 2P SEALED CONNECTOR				
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR			HOUSING FEMALE SUB ASSEMBLY				
GENERAL TOLERANCE												
	10MAX	50MAX	100MAX	250MAX	500V	ANGLE	ECCENT	PART NO.	△7283-7020-10 ETC.			
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	89. 02. 22	mm	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DRAWN	
△	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	/// 型	6	88. 07. 27	02. 09. 03	
SPECIFIED							MASS	9	02. 09. 04			
								YAZAKI CORPORATION				

1

2

3



YAZAKI CORPORATION