

SEC. A-A

GENERAL TOLERANCE											
	10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75					±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±0.2	±0.3	±0.5	±2.5	±3°	0.1
Ⓢ	±0.3	±0.5	±0.8	±1.4	±2					±3°	0.15

[illegible]


SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	PART NAME	MATERIAL	COLOR	QTY.
7289-0820-30 △7289-2657-30	①	7189-0820-30	HOUSING	PBT-G	BLACK	1
	②	7172-0880	FRONT HOLDER	PBT	NATURAL	1
	③	7137-2043-80	PACKING	SILICONE RUBBER	BROWN	1
	④	7158-9553-60	LEVER	PBT-G	GREEN	1

注記

- | | | |
|----|---------|------------------------------|
| 1. | かん合相手品番 | : 7282-0764-30 |
| 2. | 適用端子品番 | : 7116-5073-02, 7116-5152-02 |
| 3. | 適用ゴム栓品番 | : 7158-3610-80, 7158-3611-60 |

NOTES

- | | |
|-------------------------------|------------------------------|
| 1. MATING PART NO. | : 7282-0764-30 |
| 2. APPLICABLE TERMINAL NO. | : 7116-5073-02, 7116-5152-02 |
| 3. APPLICABLE SEAL RUBBER NO. | : 7158-3610-80, 7158-3611-60 |

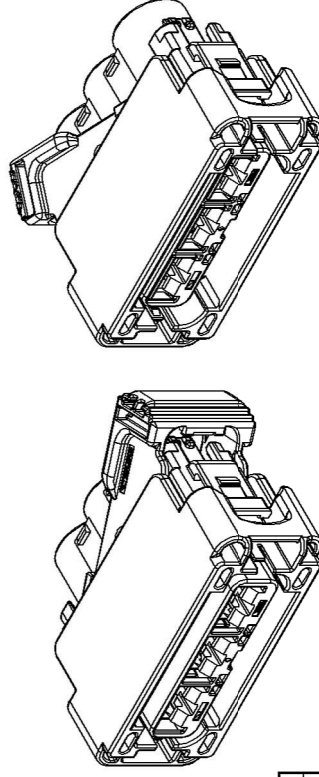

7289-0820-30

7289-2657-30

MATL. SPEC.	SEE TABLE	TREAT. & FIN.
NAME	WPC 375 3P SEALED LIF HOUSING	
SUB ASSEMBLY FEMALE		
PART NO. CH. CODE	△ 7289-0820-30 ETC.	
DWG NO.	7289-0820-30 : R	
SET DWG NO.		
YAZAKI CORPORATION		

YAZAKI CORPORATION