


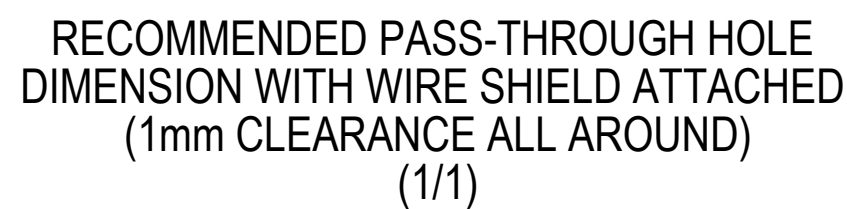




(a) (b)

2 - (0.975 (a) - 0.35 (b)) (SEE NOTE 9)

Figure 10 is a dimensional drawing of the front view of the component. It shows a series of horizontal steps with the following dimensions:

- 0.00 $\pm$ 0.15 (6.3 PITCH)
- 18.50 $\pm$ 0.15
- 2.00 $\pm$ 0.15
- 5.50 $\pm$ 0.15
- 9.00 $\pm$ 0.15
- 12.50 $\pm$ 0.15
- 16.00 $\pm$ 0.15
- 19.50 $\pm$ 0.15



NOTES:

1. PARTS MUST BE PURCHASED FROM YAZAKI.
2. PARTS MUST BE FREE OF FLASH AND IMPERFECTIONS THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: SEE 10304894-1 DRAWING (1.2 KOSTAL MLK) OR C-1452674 DRAWING (1.2 TYCO MCON).
MAX WIRE OD: 2.40mm
SEE DRAWING 7116-4270-02-R (2.8 YESC KAIZEN)
MAX WIRE OD: 3.00mm
SEE DRAWING 7116-4120-02-R (6.3 YESC)
MAX WIRE OD: 4.90mm
4. APPLICABLE WIRE SHIELD ASSEMBLY: 7274-1075
WIRE SHIELD ASSEMBLY IS INTEGRAL TO CONNECTOR FUNCTIONALITY.
FEMALE CONNECTOR ASSEMBLY DOES NOT FUNCTION WITHOUT WIRE SHIELD.
5. MATING PART NUMBER: 7286-9750-40
6. PART SATISFIES GMW 3191, DECEMBER 2007, (T2/V1/S1/MF2).
7. PART TO COMPLY WITH YPES-31-038 REQUIREMENTS.
8. THIS DIMENSION SHOWS THE PRE-SET POSITION OF THE TPA.
9. THIS DIMENSION SHOWS THE PRE-SET POSITION OF THE ISL.
10. THIS DRAWING IS TO BE USED FOR INTERNAL YAZAKI PSW SUBMISSION.
11. HANDLING MANUAL NUMBER: YPES-15-1377E.

ISSUE MARK1456

7