SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	PART NAME	MATERIAL	COLOR	QTY.
7289-5011-30	①	7189-5011-30	RH A/B TYPE 2P HOUSING FEMALE	PBT	BLACK	1
	②	7158-5262	RH TYPE 2P FRONT HOLDER FEMALE	PBT	NATURAL	1
	③	7137-2813-80	RH TYPE 2P PACKING	SILICONE RUBBER	BROWN	1
	④	7172-1097-70	RH A/B TYPE 2P SLIDER	PBT	YELLOW	1
	⑤	7144-1812	RH A/B TYPE SPRING	SUS	-	2

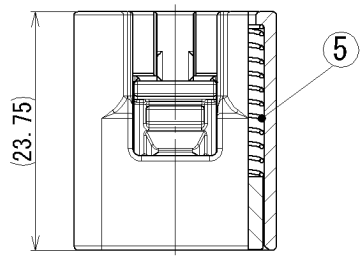

SEC. B-B

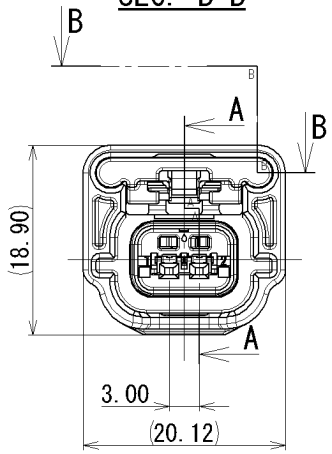



SEC. A-A

NOTES

1. MATING PART NO. : 7282-8851-30
2. APPLICABLE TERMINAL NO. : 7116-4415-02 ETC.
3. APPLICABLE SEAL RUBBER NO. : 7158-3165-90, 7158-3166-60, 7158-3167-80
   7158-3168-80, 7158-3182-20
4. APPLICABLE RUBBER STOPPER NO. : 7158-3169-40

注記

1. かん合相手品番 : 7282-8851-30
2. 適用端子品番 : 7116-4415-02 ETC.
3. 適用ゴム栓品番 : 7158-3165-90, 7158-3166-60, 7158-3167-80
   7158-3168-80, 7158-3182-20
4. 適用防水栓品番 : 7158-3169-40

GENERAL TOLERANCE											
	10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±2.5	±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4					±3°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2					±3°	0.15

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
	2015/07/10	NEW	C15-X083	T.Y

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED | MASS

CUSTOMER
CUSTOMER PART NO. | CUSTOMER DWG NO.
OFFICE | TRIAL PART NO.
VENDOR
VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	2015/07/10	mm	2:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
M.KASHIYAMA	T.YAMAWAKI	K.KAJIKAWA	T.YAMAWAKI	G.MURAKOSHI
2015/07/10	2015/07/10	2015/07/10	2014/09/04	2015/07/10

MATL. SPEC. SEE TABLE | TREAT. & FIN.

NAME RH A/B TYPE 2P HOUSING FEMALE
SUB ASSEMBLY

PART NO. CH. CODE 7289-5011-30

DWG NO. 7289-5011-30:R | SET DWG NO.

YAZAKI CORPORATION